
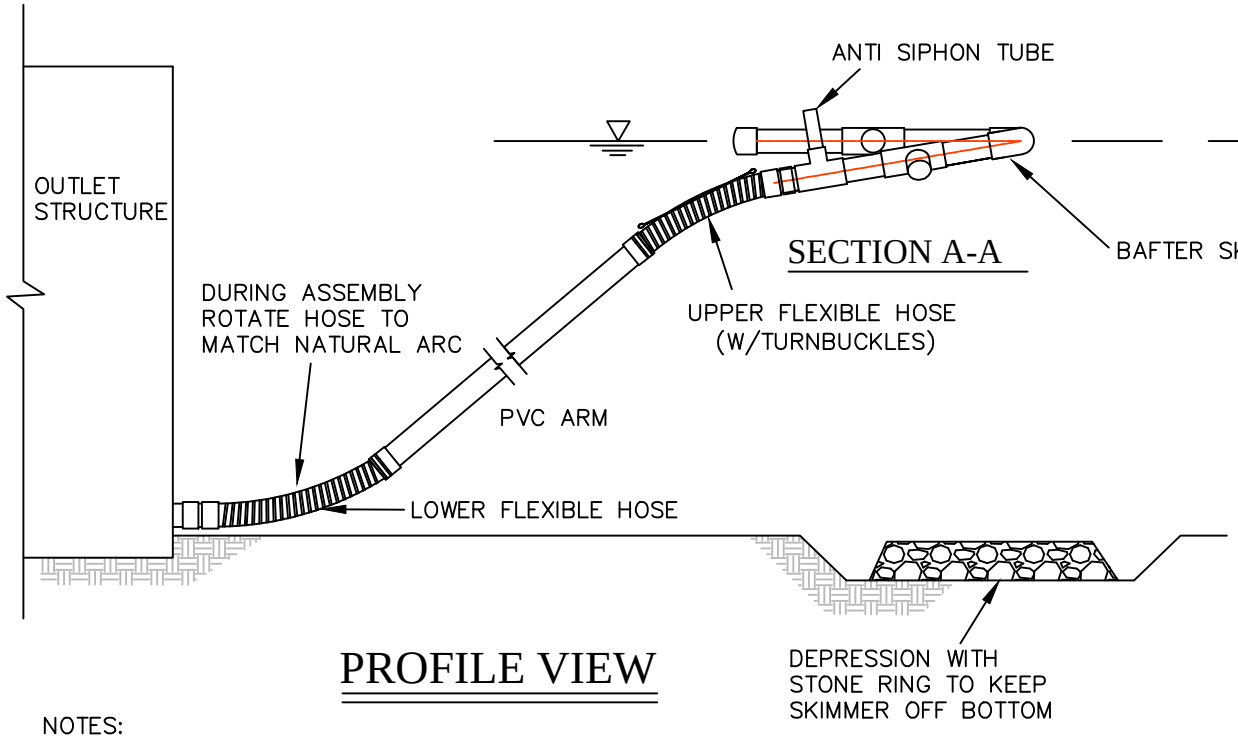


PROFILE VIEW

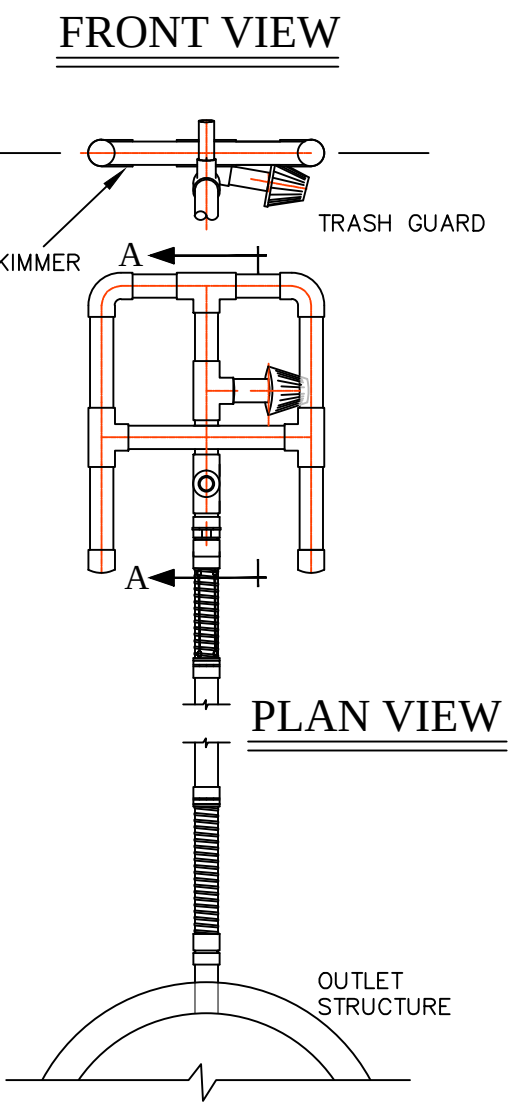

PLAN VIEW

NOTES:

1. MAXIMUM POND WATER DEPTH TO BE 7' TO OVERFLOW FOR 10 YEAR STORM WITH ARM SUPPLIED.
2. DESIGN REQUIRES A ___ INCH SKIMMER WITH A ____ INCH ORIFICE & (IF REQD.) A SECOND ___ INCH SKIMMER WITH A ____ INCH ORIFICE.
3. SKIMMER(S) TO BE INSPECTED WEEKLY AS PART OF THE REQUIRED CEPSCI INSPECTION.
4. MULTIPLE UNITS MAY BE UTILIZED IN THE SAME BASIN IF A HIGHER DISCHARGE RATE IS NEEDED. EACH MUST HAVE ITS OWN CONNECTION TO THE OUTLET STRUCTURE.
5. THE ILLUSTRATION SHOWN IS OF THE 2,3 & 4 INCH SKIMMERS. THE 6 & 8 INCH UNITS HAVE DIFFERENT INTAKE AND TRASH GUARD CONFIGURATIONS. OTHERWISE THEY LOOK THE SAME.

BAFTER SKIMMER
P.O. BOX 135
Tigerville, S.C. 29688
Ph. 864-895-4400 (Cell 1) 864-420-7082 (Cell 2) 864-630-7747
bafter@email.com

LAYOUT FOR 2, 3 & 4 " SKIMMERS